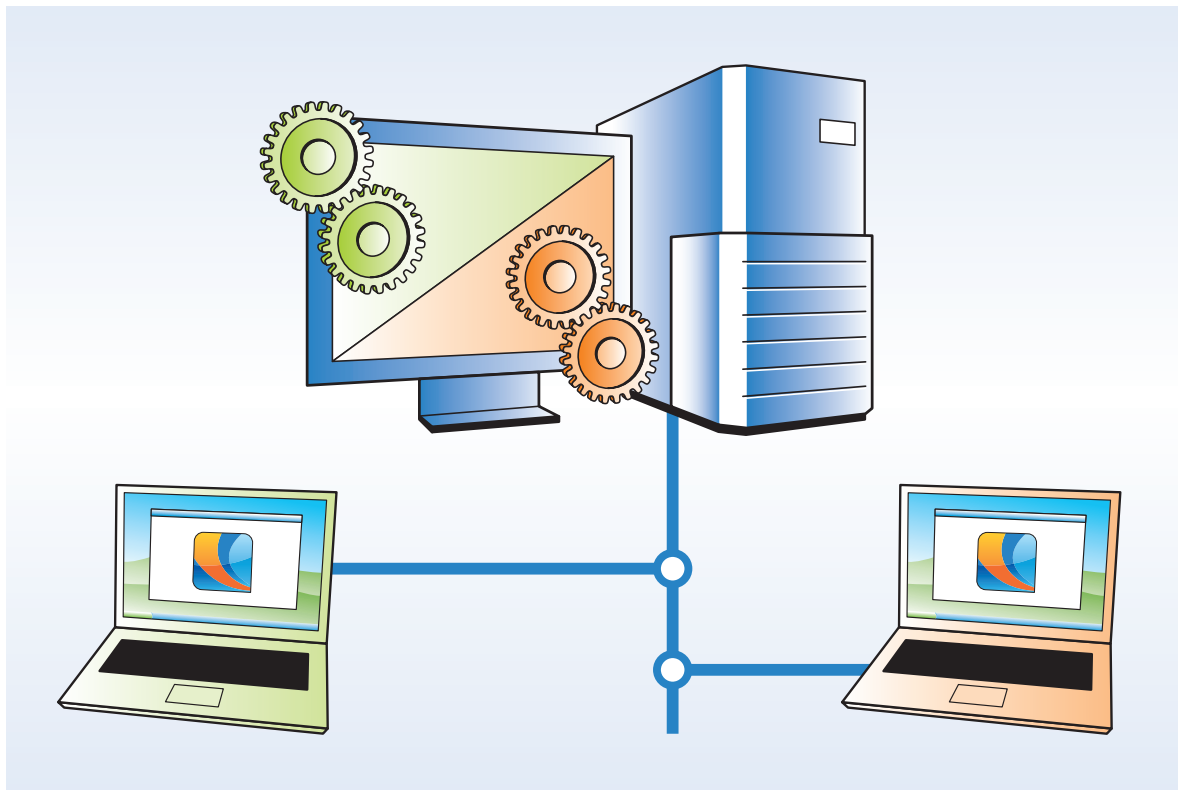


SM99 Client BMS**Overview**

With the SM99 CLIENT BMS software module, clients with their project planning of multiple TBEs (Technical Building Equipment) can be managed on the Neutrino BMS.

Thanks to the functionality of this software module, "Multi-client" mode is available on the Neutrino BMS, in which these clients can be set up with their project planning. This way, several clients can use the same network structures, output devices and software modules of a Neutrino BMS for their project planning. Also, existing plant graphics, the cliparts library and the parameterized BMS data points can be accessed by the individual clients. This way, it is possible to create plant graphics with the corresponding fade-in points for several project plannings quickly and easily.

The BMS configuration of the Neutrino BMS can be configured individually for each client so that only those software modules are displayed which are relevant for the client in question. The access of a client to his project planning can be time-limited or deactivated. The activated and deactivated project plannings are displayed with the corresponding symbols in a separate window.

In a network, multiple clients can access to the Neutrino BMS from a Windows computer using the optional PHWIN or PHWEB software module in order to carry out the corresponding operator control actions in their project planning.

Änderungen vorbehalten - Contents subject to change - Sous réserve de modifications - Reservado el derecho a modificación - Wijzigingen voorbehouden - Con riserva di modifichè - Innehåll som skall ändras - Změny vyhrazeny - Zmiany zastrzeżone - Возможны изменения - A változtatások jogát fenntartjuk - 保留未经通知而改动的权力

Features

- Several clients can be managed with their project plannings on the Neutrino BMS.
- The BMS configuration can be configured individually for every client.
- Access of the clients to their project plannings can be time-limited or deactivated.
- Activated and deactivated project plannings can be displayed in a separate window with the corresponding symbols.
- Access of multiple client can be enabled to the Neutrino BMS in a network with the PHWIN or PHWEB software module.

Functional design

Through the functionality of the CLIENT BMS software module, multiple clients with their project plannings can be set up on the Neutrino BMS in “multi-client” mode. In this mode, a client manager is set up first, who assumes the tasks of the set up of clients as well as the individual configuration of the BMS configuration for client. Every client is set up with a client name by the client manager.

The client manager can decide whether a client can access his project plannings or whether this access should be time-limited. The clients must logon to the Neutrino BMS with their operator names, code words and client names, so that they can access their project plannings.